



LST TRV KITS

MYSON offer a flexible and comprehensive range of chrome TRV kits that are specifically designed to maximise the effectiveness of our range of LST radiators. For information on our LST range please see page 40.



Kits supplied with 'A' rated TRVs for energy efficiency

DIRECTFIT

We offer three designs, the Close Coupled Kit and the Universal Close Coupled Kit, which allows the case to be removed for cleaning without removing the TRV head, and the competitively priced Direct Fit Kit. All of the kits come with our A-rated TRV and are expertly designed for precision control.

The kits allow the thermal sensing head of a MYSON Thermostatic Radiator Valve to be mounted directly onto the LST enclosure of a MYSON Low Surface Temperature Radiators. They also feature a locking facility that prevents unauthorised adjustment in public areas.

General specification



CERTIFICATION

Produced under a quality management system - ISO 9001:2008. Manual valve conforms to BS 2767-10 and TRV complies to EN 215-1.



GUARANTEE

2 year guarantee from date of purchase against manufacturing defects.



COLOUR

Finished in chrome.



CONNECTIONS

Compression and screwed iron (direct fit only).



OPERATING PRESSURES

Operating pressure 10 bar (compression).



OPERATING TEMPERATURE

Operating temperature 120°C (compression).




DELIVERY

2 - 5 working days.

For more general information, please see page 254.

Direct fit TRV kit

Available for all LST's **except Vertical and 420mm wide**.
Suitable for TBOE connection only.
This kit allows a MYSON TRV to be mounted directly onto the internal radiator, making it an integral part of the LST radiator.
This option utilises the 38mm knock out in the LST casing.

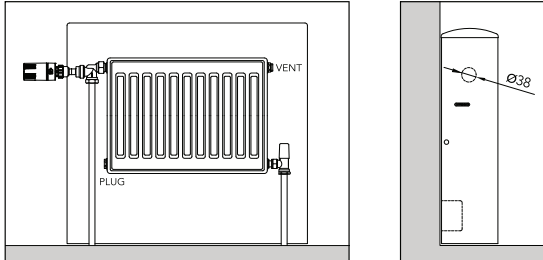


Direct Fit TRV Kit comprises:

- 1 x Horizontal angle TRV body
- 1 x TRV head
- 1 x Extension adaptor
- 1 x Plastic bush
- 1 x MATCHMASTER lockshield valve

Order Code: LSTDIRECTKITUK

Close coupled TRV kit

Available for all LST's **except Vertical and 420mm wide**.
Suitable for TBOE, TBSE or BOE connections.
This kit allows the MYSON TRV to be mounted directly onto the LST casing, with a choice of positions for both the TRV head and TRV angled valve body.
This option utilises the 23mm knock out on the LST casing.

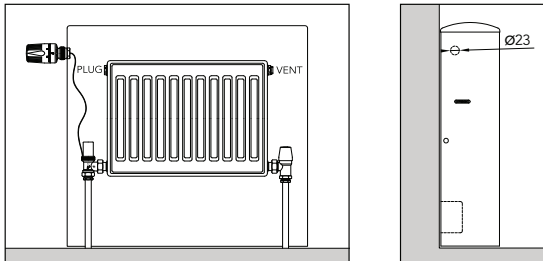


Close Coupled TRV Kit comprises:

- 1 x TRV head**
- 1 x TRV angled body**
- 1 x LST capillary unit/actuator/sensor head adaptor
- 1 x MATCHMASTER angled lockshield valve
- 1 x Locking tool

Order Code: LSTCKKITUK

Universal close coupled TRV kit†

Available for all LST's. Suitable for TBOE, TBSE or BOE connections.
This kit allows the MYSON TRV to be mounted directly onto the LST casing, with a choice of positions for both the TRV head and TRV straight valve body.
This option utilises the 23mm knock out on the LST casing.

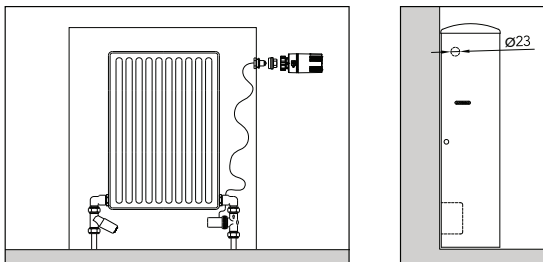

Universal Close Coupled TRV Kit Comprises:

- 1 x TRV head**
- 1 x TRV straight body**
- 1 x LST capillary unit/actuator/sensor head adaptor
- 1 x MATCHMASTER straight lockshield valve
- 2 x Integration elbows

Order Code: LSTUNIKITUK

†For LST Vertical instructions, please refer to page 47. **15mm compression copper only - for 1/2" iron pipe, an additional female adaptor is required.

LST TRV kits

Description	Colour (Top)	Order Code	Minimum Order Qty
Direct Fit Kit (1/2" Copper or 1/2" BSP) IRELAND Chrome*	White	LSTDIRECTKITIE	1
Direct Fit Kit (15mm Copper or 1/2" BSP) UK Chrome	White	LSTDIRECTKITUK	1
Universal Close Coupled Kit (1/2" Copper) IRELAND Chrome*	White	LSTUNIKITIE	1
Universal Close Coupled Kit (15mm Copper) UK Chrome	White	LSTUNIKITUK	1
Close Coupled Kit (1/2" Copper) IRELAND Chrome*	White	LSTCKKITIE	1
Close Coupled Kit (15mm Copper) UK Chrome	White	LSTCKKITUK	1

LST TRV kit accessories

Capillary Assembly - 2m	-	LSTCAP2	1
TRV Head Locating Body Chrome	White	LSTTRVHLB	1

*ROI only.